


ADJUST ANGLE THERMOMETER MERCURY FREE, STANDARD MODEL : 9 IT

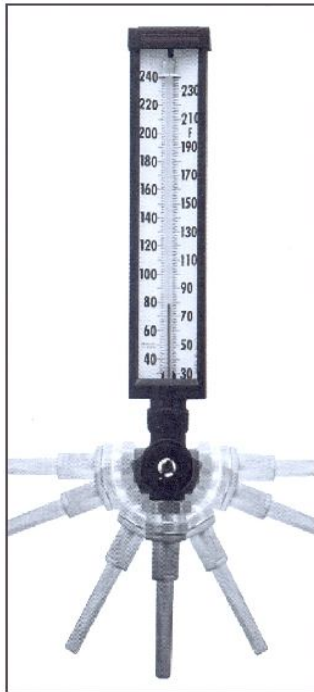

Versatile, environmentally friendly,
organically liquid filled tube (mercury-free)
that is used in various applications

SPECIFICATIONS

Scale	: 9" (228mm), Aluminium or Valox®, impact resistant, dual scale standard, (single scale optional)
Lens	: Glass
Liquid Fill	: Organic Liquid
Stem	: 3½" (90mm) or 6" (150mm), fully adjustable
Connection	: ¾" NPT with brass thermowell standard 1¼ UNF swivel nut (without thermowell)
Accuracy	: +/- 1%

PRODUCT CODES

RANGE	ALUMINIUM		VALOX®	
	3½" (90mm)	6" (150mm)	3½" (90mm)	6" (150mm)
-40-110°F & -40-40°C	T101A	T101-6A	T101	T101-6
0-120°F & -15-50°C	T102A	T102-6A	T102	T102-6
0-160°F & -15-70°C	T103A	T103-6A	T103	T103-6
30-180°F & -0-80°C	T104A	T104-6A	T104	T104-6
30-240°F & -0-115°C	T100A	T100-6A	T100	T100-6
30-300°F & -0-150°C	T105A	T105-6A	T105	T105-6
50-400°F & -10-205°C	T106A*	*	*	*
10-550°F & -12-285°C	T107A*	*	*	*
**170 / 270 F&P (retort)	T115A	*	T115	*
**80 / 135 C / kg (retort)	T117A	*	T117	*

APPLICATIONS

- ◆ All types of industrial application.
- ◆ Retort Thermometers utilized in food / canning application

Other range available upon request

Specifications are subject to change without prior notice