


VAP Electric Actuator



The power behind **your mission**

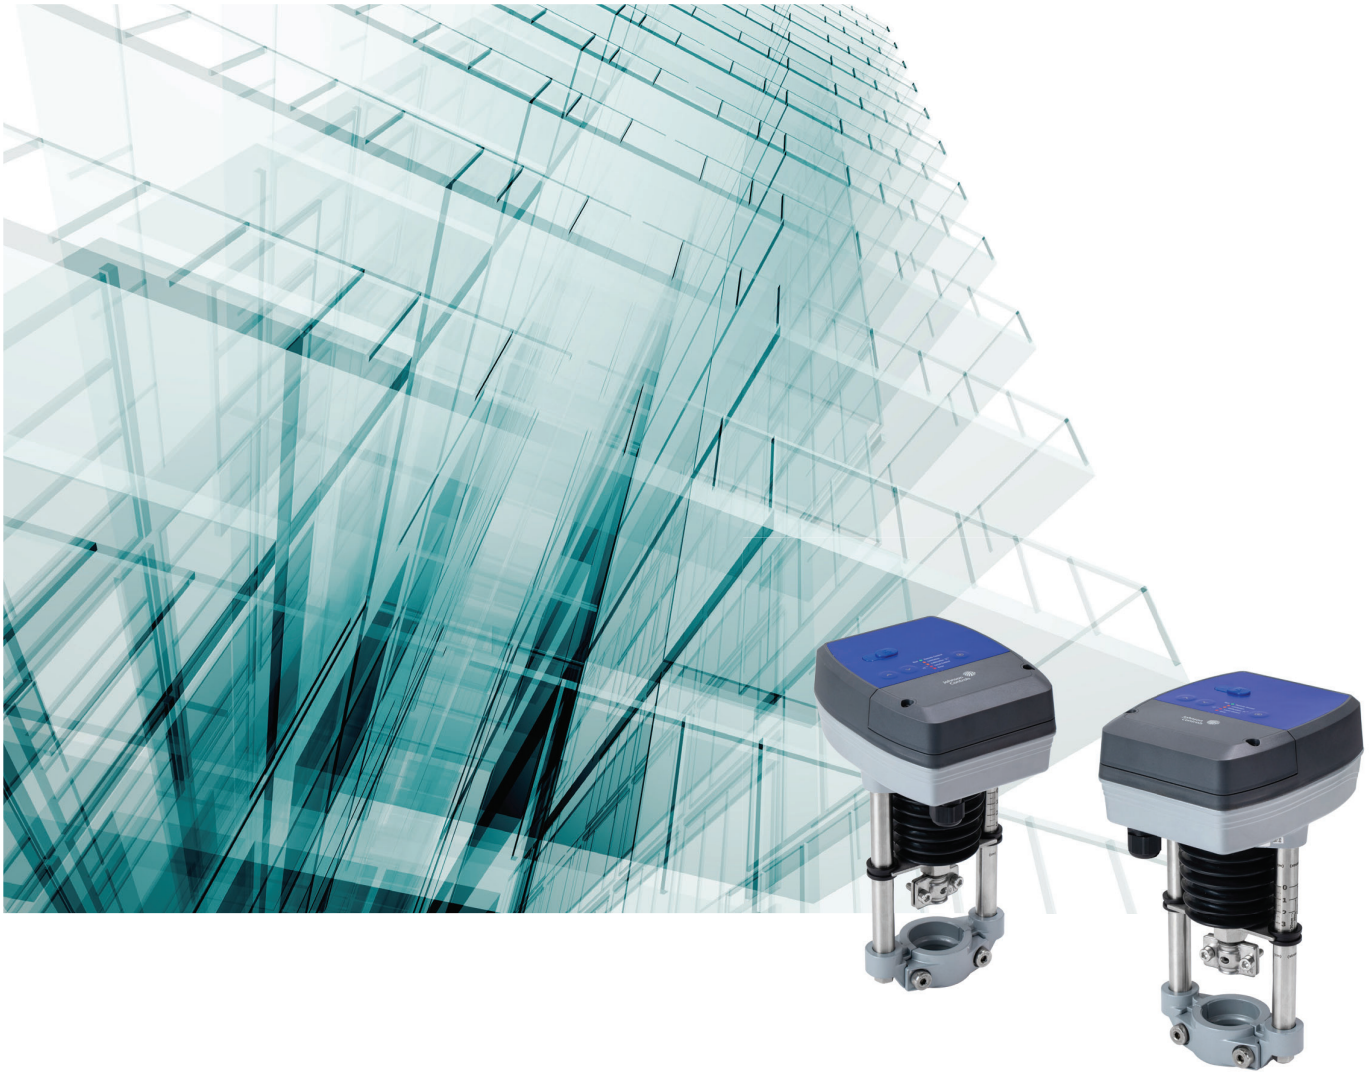

Electric Actuator

VAP Series



600N, 1000N, 3000N

The VAP series BLDC motor-driven actuators are available for proportional control or 3-point (floating) control. They feature stroke calibration and manual operating which are user friendly to job sites.

In combination with VGA7000, VGA8000 or VPMA series valves, they provide specified close-off pressure according to the application requests.

FEATURES

- Proportional control, floating control mode selectable
- Multiple input and feedback signal selectable
- Stroke calibration ensure stroke consistency with valve
- Manual override and LED status indication
- Running time adjustable for different applications
- Direct mounting on valves, no linkage required

ORDERING INFORMATION

VA	P	600	S	-24	-B
VA	Valve Actuator				
	P	Type: Proportional control / Floating control			
		600	Rated Force: 600 = 600N, 1000 = 1000N, 3000 = 3000N		
			S	Rated Stroke: S = 30mm, L = 50mm	
				-24	Power supply: -24 = 24V, 50/60Hz
					Action (factory setting):
				-B	-B = Actuator stem extends when input signal increases
					-C = Actuator stem retracts when input signal increases



SELECTION TABLE

Product Number	Rated Force (N)	Rated Stroke (mm)	Connection to valve	Action	Valve Series
VAP600S-24-B	600	30	S12	actuator stem extends when input signal increases	VGA7000 series Globe Valve VGA8000 series Globe Valve
VAP1000S-24-B	1000	30	S12		
VAP1000L-24-B	1000	50	S14		
VAP3000L-24-B	3000	50	S14	actuator stem retracts when input signal increases	VPMA series PICV
VAP600S-24-C	600	30	S12		
VAP1000L-24-C	1000	50	S14		
VAP3000L-24-C	3000	50	S14		

Note: See “VGA7000 series Valve”, “VGA8000 series Valve” and “VPMA series Valve” Product Bulletins for more information of valves and compatibility selection tables.

TECHNICAL SPECIFICATIONS

Control Modes	Proportional Control	Floating Control
Input Signal	0(2)~10VDC / 0(4)~20mA	3-point
Feedback Signal	0(2)~10VDC / 0(4)~20mA	
Supply Voltage (50/60Hz)	24VAC / VDC \pm 15%	
Power Consumption	VAP600xx / VAP1000xx : 27VA (24VAC), 12VA (24VDC) VAP3000xx : 40VA (24VAC), 20VA (24VDC)	
Running Speed	Selectable (High speed: 1s/mm; Low speed: 2s/mm)	
Input Impedance	100k Ω min. at 0(2)~10V; 0.15k Ω max. at 0(4)~20mA	
Operating Status Indications	LED	
Enclosure protection	IP65 (EN60529)	
Cable Entry	Waterproof connector PG13.5	
Wiring terminal	1 ~ 6mm ²	
Ambient Operating Condition	-25°C to 65°C, \leq 95% RH%, non-condensing	
Ambient Storage Condition	-40°C to 65°C, \leq 95% RH%, non-condensing	
Materials	Cover	PC
	Housing and Yoke	Stainless Steel
Net weight (kg)	VAP600xx / VAP1000xx : 3.0kg; VAP3000xx : 3.8kg	
CE Compliance	Johnson Controls declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive and Low Voltage Directive.	

WIRING DIAGRAM

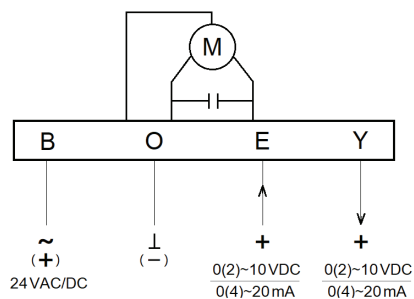


Fig 3: Proportional Application


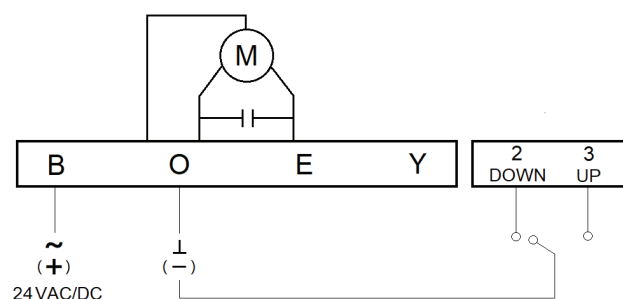


Fig 4: Floating Application

MANUAL OPERATING AND LED INSTRUCTION

VAP series actuator has 3 buttons with LED indications:


1. The actuator provides 2 manual modes: manual override and electric manual operating (local control mode).
2. Insert the crank (under the actuator) in the hexagonal hole on the cover, the power to motor is cut-off and manual override is engaged.
3. Press the "▲" and "▼" buttons at the same time for more than 5 seconds, then release the actuator to enter the local control mode (electric manual operating). After setting is completed, press the "▲" and "▼" buttons again for more than 5 seconds then release to exist local control mode.

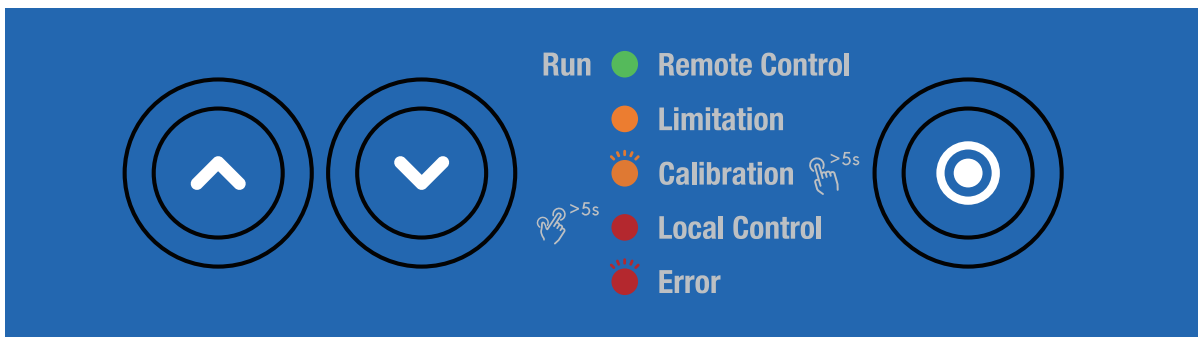

LED Indication (▲ and ▼)		LED Indication (●)	
Green steady on	Moving to position	Green steady on	Remote control mode
Orange steady on	Position reached	Orange blinking (1Hz)	Stroke calibrating
Red blinking (1Hz)	Alarm	Red blinking (2Hz)	Alarm
Red steady on	Local control mode	Red steady on	Local control mode


DIP SWITCH SETTINGS

Factory Setting (white buttons are the switches):

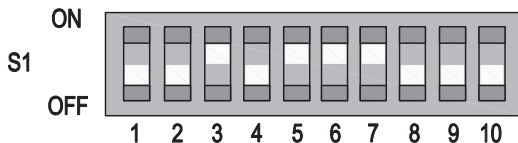

VAPxxxx-24-B

Input and feedback signal: 0~10 VDC
Stem extends when input signal increases

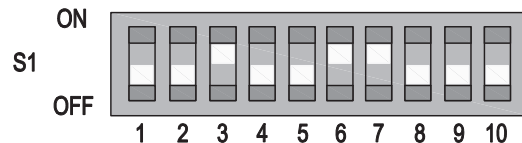

VAPxxxx-24-C

Input and feedback signal: 0~10 VDC
Stem retracts when input signal increases



DIP	Function	Setting and Description	
S1-1	Input/feedback signal	ON	4~20mA or 2~10V
		OFF	0~20mA or 0~10V
S1-2 S1-3	Type of input signal	S1-2 ON S1-3 OFF	Current input signal
		S1-2 OFF S1-3 ON	Voltage input signal
S1-4	Type of feedback signal	ON	Current feedback signal
		OFF	Voltage feedback signal
S1-5	Action of movement	ON	Stem extends when input signal increases; Stem retracts when input signal decreases
		OFF	Stem retracts when input signal increases; Stem extends when input signal decreases
S1-6	Action at signal loss	ON	The actuator acts in corresponding to the minimum input signal
		OFF	1) The actuator acts in corresponding to the maximum input signal (applicable to voltage input signal) 2) The actuator acts in corresponding to the minimum input signal (applicable to current input signal)
S1-7	Stroke calibration	ON	Automatic stroke calibration when powered
		OFF	Manual stroke calibration
S1-8	Control type	ON	Floating (3 points) control
		OFF	Proportional control
S1-9	Pre-set position at signal loss ^①	ON	Actuator stays in position when signal loss (only applicable to input signal of 4~20mA)
		OFF	Actuator acts in corresponding to the setting of S1-6
S1-10	Running speed	ON	High speed: 1s/mm
		OFF	Low speed: 2s/mm

Note: ① Staying in position at signal loss is only available when input signal is 4~20mA.

DIEMENSIONS (mm)

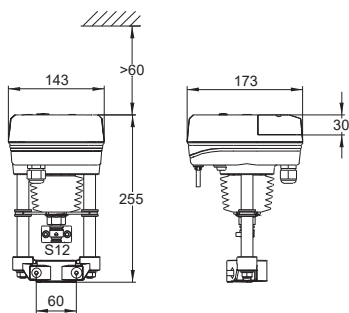


Fig 5: VAP600S / VAP1000S

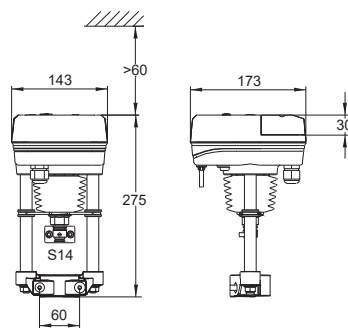


Fig 6: VAP1000L

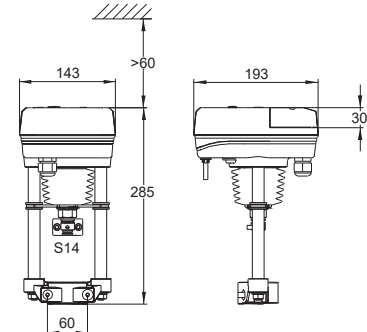


Fig 7: VAP3000L

Software License. Any software (including firmware) included in or with this product is licensed, not sold, and is subject to the terms of the Johnson Controls End User License Agreement available at <https://www.johnsoncontrols.com/buildings/legal/digital/generaleula>. Any open source software included in or with this product is subject to the terms of its respective license. By using any of the foregoing software, you are also agreeing to be bound to the terms of such licenses.

Johnson Controls:

At Johnson Controls, we transform the environments where people live, work, learn and play. From optimizing building performance to improving safety and enhancing comfort, we drive the outcomes that matter most. We deliver our promise in industries such as healthcare, education, data centers and manufacturing. With a global team of 105,000 experts in more than 150 countries and over 130 years of innovation, we are the power behind our customers' mission. Our leading portfolio of building technology and solutions includes some of the most trusted names in the industry, such as Tyco®, York®, Metasys®, Ruskin®, Titus®, Frick®, Penn®, Sabroe®, Simplex®, Ansul® and Grinnell®.

For more information, visit www.johnsoncontrols.com or follow us [@johnsoncontrols](https://twitter.com/johnsoncontrols) on Twitter.

AUSTRALIA

5 Lindwall Place,
Rouse Hill,
NSW 2155, Australia

HONG KONG

11/F & 12/F,
Millennium City 6,
392 Kwun Tong Road,
Kwun Tong,
Kowloon, Hong Kong

INDONESIA

Wisma 77, 16th Floor,
Jl. S. Parman Kav. 77,
Slipi,
Jakarta 11410,
Indonesia

MALAYSIA

Luxor Tech Centre,
Level 2,
No. 1A, Jalan
Teknologi, Taman
Sains Selangor 1, Kota
Damansara, PJU 5,
47810 Petaling Jaya,
Selangor Darul Ehsan,
Malaysia

SINGAPORE

31 International
Business Park Road,
#03-02, Lobby D & E,
Singapore 609921

KOREA

34, Mareunnae-ro,
Jung-gu,
Seoul, 04555, Korea

THAILAND

Rama 9 Road, 719 KPN
Tower,
8th Floor, Bangkapi,
Huaykwang,
Bangkok, 10310
Thailand

The power behind **your mission**

